





RoHS Compliant



**SPECIFICATION :**


**1. Electrical Char.**

Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.  
 Contact Resistance : 30milli-Ohm Max.  
 Rating Current : 1.5A Max.  
 Rating Voltage : 150V AC.  
 Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

**2. Physical char.**

Housing : For Waving Soldering Process  
 Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.  
 Color : Black Color  
 Spring Wire:  
 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel  
 Shielded : Brass Plating Nickel  
 Temperature Range : - 40°C / +85°C  
 Durability : 500 Mating cycles Min.

**AJ-068SH-8-F-RX-B4-N1-XX**

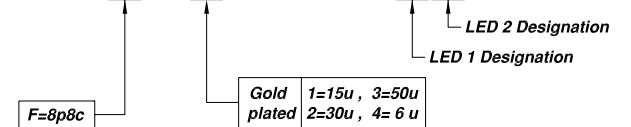

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow

**ALLSUN CORPORATION**

9FL, NO.292 SEC.7 CHENG TEH ROAD. TAIPEI TAIWAN.  
 E - mail Address : allsun @ globalsources. com

**TITLE**

**RJ45 SIDE ENTRY SHIELDED PCB JACK WITH LED**

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

**AJ-068SH-8-F-RX-B4-N1-XX**

SCALE SIZE DWG. NO. 9715S SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR	MM INCH	.00±0.01 .000±0.005 .0000±0.002	Steven CK'D	MAY-31 '13
	ANGLE +0° 30'	RADII	+0.45 -0.15	John APP'D	MAY-31 '13
MM INCH				Billy	MAY-31 '13

DWG. NO.

**AST068A04-1**