





RoHS Compliant



SPECIFICATION :


1. Electrical Char.

Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
 Contact Resistance : 30milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 150V AC.
 Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

Housing : For Waving Soldering Process
 Nylon (UL 94V-0),Soldering Temperature:260°C for 5 Sec.
 Color : Black Color
 Spring Wire:
 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
 Shielded : Brass Plating Nickel
 Temperature Range : - 40°C / +85°C
 Durability : 500 Mating cycles Min.

AJ-068SH-8-F-RX-B4-N4-XX

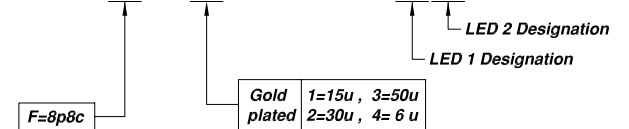

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow

ALLSUN CORPORATION

9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.
 E - mail Address : allsun @ globalsources. com

TITLE

RJ45 SIDE ENTRY SHIELDED PCB JACK WITH LED

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

AJ-068SH-8-F-RX-B4-N4-XX

SCALE SIZE DWG. NO. 9715S SERIES

DWG. NO.

AST068A05-1

NOT SCALED
DRAWING

TOLERANCE UNLESS
OTHERWISE NOTICE

INCH

MM

DR.

DATE

Steven

MAY-31 '13

CK'D

Johnn

MAY-31 '13

APP'D

Billy

MAY-31 '13



THIRD ANGLE PROJECTION

LINEAR $\frac{MM}{INCH}$

.00±0.01
.000±0.005
.0000±0.002

.00±0.25
.000±0.13
.0000±0.05

ANGLE +0° 30'

RADII

+0.45
-0.15

$\frac{MM}{INCH}$