
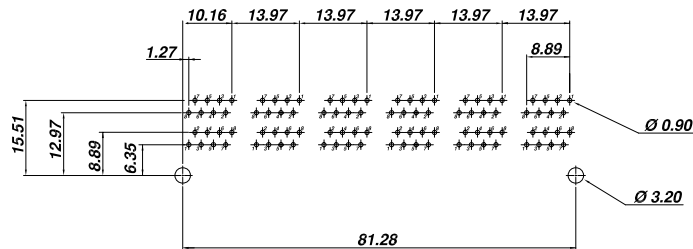
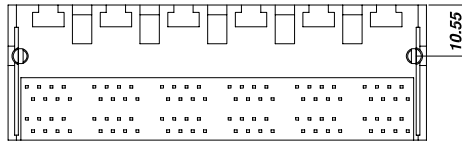



RoHS Compliant

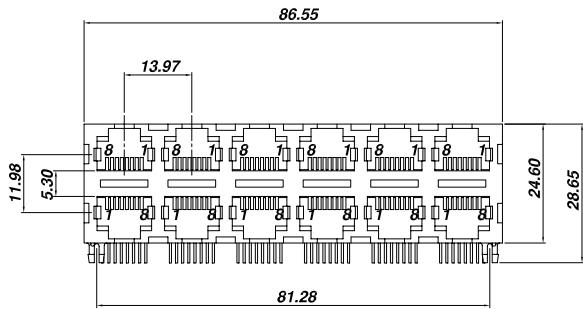

PCB LAYOUT
(Top View)

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

- Housing (Option) : For Waving Soldering Process
 - PBT Glass Filled (UL 94V-0), Soldering Temperature: 245°C for 5 Sec.
 - Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.
- Color : Black Color
- Spring Wire :
 - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

AJ-500-26-F-XX

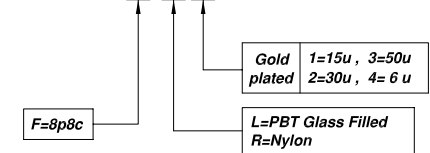

ALLSUN CORPORATION

9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.
E - mail Address : allsun@globalsources.com

TITLE

DOUBLE DECK GANG PCB JACK

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

AJ-500-26-F-XX

SCALE SIZE DWG. NO.9600 SERIES

DWG. NO.

AST500A09-1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE MAY-31 '13
THIRD ANGLE PROJECTION	LINEAR	$.00 \pm 0.01$ $.000 \pm 0.005$ $.0000 \pm 0.002$	$.00 \pm 0.25$ $.000 \pm 0.13$ $.0000 \pm 0.05$	CK'D <i>Johnn</i>	MAY-31 '13
MM INCH	ANGLE +0° 30'	RADII	+0.45 -0.15	APP'D <i>Billy</i>	MAY-31 '13