
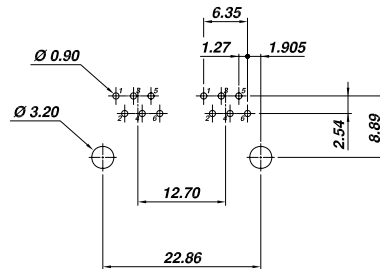




RoHS Compliant



PCB LAYOUT  
( Top View )

**SPECIFICATION :**


**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

**2. Physical char.**

- Housing (Option) : For Waving Soldering Process
- PBT Glass Filled (UL 94V-0),Soldering Temperature:235°C for 5 Sec.
- Nylon (UL 94V-0),Soldering Temperature:260°C for 5 Sec.
- Color : Black Color
- Spring Wire :
  - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

**AJ-019-16-2-X-XX**

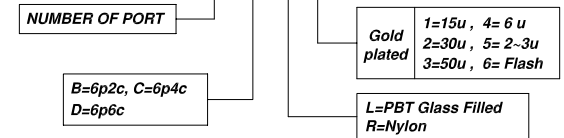

**ALLSUN CORPORATION**

9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.  
E - mail Address : allsun @ globalsources. com

**TITLE**

1x2 6 POSITIONS  
VERY LOW PROFILE GANG PCB JACK  
UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR**  
**AJ-019-16-2-X-XX**

**SCALE SIZE DWG. NO. 9667 SERIES**

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
	LINEAR	$.00 \pm 0.01$ $.000 \pm 0.005$ $.0000 \pm 0.002$	$.00 \pm 0.25$ $.000 \pm 0.13$ $.0000 \pm 0.05$	Steven	MAY-31 '13
	ANGLE +0° 30'	RADII	+0.45 -0.15	John	MAY-31 '13
				Billy	MAY-31 '13

DWG. NO.

AST019A08-1