
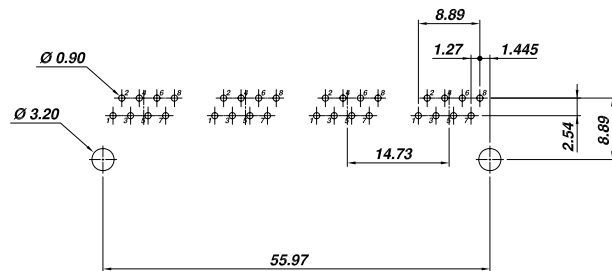
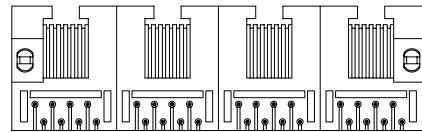



RoHS Compliant

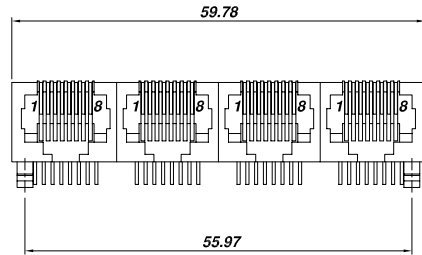

PCB LAYOUT  
( Top View )

**SPECIFICATION :**


**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

**2. Physical char.**

- Housing (Option) : For Waving Soldering Process
- PBT Glass Filled (UL 94V-0), Soldering Temperature: 235°C for 5 Sec.
- Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.
- Color : Black Color
- Spring Wire :
  - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

**AJ-019-18-4-F-XX**

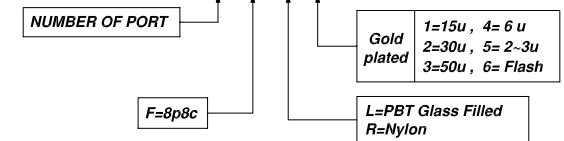

**ALLSUN CORPORATION**

9FL, NO.292 SEC.7 CHENG TEH ROAD. TAIPEI TAIWAN.  
E - mail Address : allsun @ globalsources. com

**TITLE**  
1x4 8 POSITIONS  
VERY LOW PROFILE GANG PCB JACK  
UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR**  
**AJ-019-18-4-F-XX**

**SCALE SIZE DWG. NO. 9668 SERIES**

DWG. NO.

AST019A13-1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE MAY-31 '13
THIRD ANGLE PROJECTION	LINEAR	.00±0.01 .000±0.005 .0000±0.002	.00±0.25 .000±0.13 .0000±0.05	CK'D <i>Johnn</i>	MAY-31 '13
	ANGLE +0° 30'	RADII	+0.45 -0.15	APP'D <i>Billy</i>	MAY-31 '13