
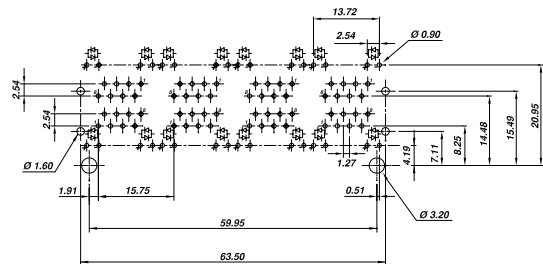




RoHS Compliant

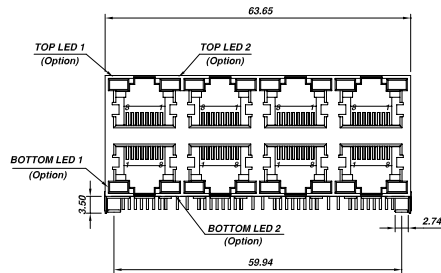

PC Layout
(Top View)

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

- Housing (Option) : For Waving Soldering Process
- PBT Glass Filled (UL 94V-0), Soldering Temperature: 245°C for 5 Sec.
- Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

AJ-091-24-F-XX-N1-XX

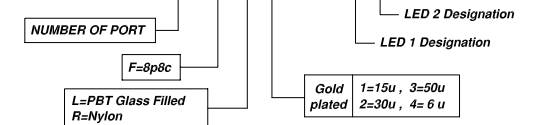

ALLSUN CORPORATION

9FL, NO.292 SEC.7 CHENG TEH ROAD. TAIPEI TAIWAN.
E - mail Address : allsun@globalsources.com

TITLE **RJ45 2X4 8 POSITIONS**
DOUBLE DECK GANG SHIELDED JACK WITW LED
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-091-24-F-XX-N1-XX

SCALE SIZE DWG. NO. 9791S SERIES

DWG. NO.

AST091A07-1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$.00±0.01	.00±0.25	<i>Steven</i>	MAY-31 '13
		.000±0.005	.000±0.13	<i>CK'D</i>	
$\frac{MM}{INCH}$	ANGLE +0° 30'	.0000±0.002	.0000±0.05	<i>Johnn</i>	MAY-31 '13
			+0.45	<i>APP'D</i>	
			-0.15	<i>Billy</i>	MAY-31 '13